


VPU PV I+II 3 1000

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Product image

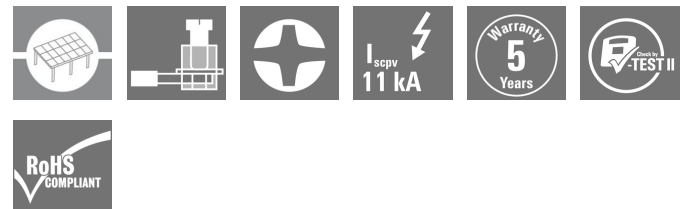

Similar to illustration

Type II surge voltage arrester for use in photovoltaic applications

- Pluggable arrester
- Suitable for protecting DC systems
- High energy absorption with short response time
- Tested in accordance with EN 50539-11
- Suitable for use in accordance with IEC 60364-7-712 / EN 50539-12
- Coded voltage level
- Installation in distribution board
- Thermal protection function

General ordering data

Version	Surge voltage arrester, Low voltage
Order No.	2530610000
Type	VPU PV I+II 3 1000
GTIN (EAN)	4050118540826
Qty.	1 pc(s).
Replacement parts	2530600000 2534300000

Creation date April 27, 2022 1:52:01 PM CEST

Catalogue status 22.04.2022 / We reserve the right to make technical changes.

VPU PV I+II 3 1000

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	86 mm	Depth (inches)	3.386 inch
Height	96 mm	Height (inches)	3.78 inch
Width	54 mm	Width (inches)	2.126 inch
Mounting dimension - height	85 mm	Net weight	470 g

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
Humidity	5 - 95% rel. humidity		

Rated data UL

Certificate No. (UR)	E354261	Ambient temperature (operational), max. 85 °C	
Rated Voltage U_N	1,100 V	SCCR	50 kA
I_n	20 kA	Category	SPD TYPE 1CA
Rated current (UL)	1,100 V	Ambient temperature (operational), min. -40 °C	
Certificate No. (cURus)	E354261	VPR (DC+/DC-)	2,500 V
VPR (DC-/G)	2,500 V	Voltage type	DC

General data

Colour	black, orange	Design	Installation housing; 3TE, Insta IP 20
Operating altitude	≤ 2000 m	Optical function display	green = OK; red = arrester is defective - replace
Protection degree	IP20	Rail	TS 35
UL 94 flammability rating	V-0		

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Photovoltaic technical data

Discharge current I_n (8/20 μs)	20 kA	Discharge current, max. (8/20 μs)	40 kA
Lightning test current I_{imp} (10/350 μs)	6.25 kA	Operating height in the grounded PV system	≤ 2000 m
Operating height in ungrounded PV system	< 4,000 m, see operating instructions	PV system voltage, max. U_{cpv}	1,100 V
Protection level U_p (+/-, -/PE, +/-PE)	≤ 3.8 kV	Requirements class	Type I/II
Short-circuit current I_{SCPV}	11,000 A	Standards	EN 50539-11, UL 1449
Total discharge current I_{total} (8/20 μs)	50 kA	Total discharge current I_{total} (10/350 μs)	12.5 kA

Rated data IEC / EN

Discharge current, max. (8/20 μs)	40 kA	Leakage current at U_n	30 μA
Lightning test current I_{imp} (10/350 μs)	6.25 kA	Number of poles	3
Rated voltage (DC)	1000 V	Response time	≤ 25 ns
SPD type	T1, T2	Signalling contact	No
Standards	EN 50539-11, UL 1449	Voltage type	DC

VPU PV I+II 3 1000

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Connection data

Type of connection	Screw connection	Stripping length, rated connection	18 mm
Tightening torque, min.	2 Nm	Tightening torque, max.	4.5 Nm
Clamping range, rated connection	16 mm ²	Clamping range, min.	1.5 mm ²
Clamping range, max.	35 mm ²	Wire cross-section, solid, min.	1.5 mm ²
Wire cross-section, solid, max.	16 mm ²	Wire connection cross section, finely stranded, min.	1.5 mm ²
Wire connection cross section, finely stranded, max.	25 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), min.	1.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), max.	25 mm ²	Connection cross-section, stranded, min.	1.5 mm ²
Connection cross-section, stranded, max.	35 mm ²		

Ratings IECEx/ATEX/cUL

Certificate no. (cULus) E354261

Guarantee

Time interval 5 years

Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ETIM 8.0	EC000941	ECLASS 9.0	27-13-08-05
ECLASS 9.1	27-13-08-05	ECLASS 10.0	27-13-08-05
ECLASS 11.0	27-13-08-05		

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	EAC VPU SERIES CE_VPU_PV
Engineering Data	CAD data – STEP
Tender specification	Ausschreibungstext DE Tenderspecification EN
User Documentation	Beipackzettel / Instruction sheet
Catalogues	Catalogues in PDF-format


VPU PV I+II 3 1000

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Electric symbol



Circuit diagram

VPU PV I+II 3 1000

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Crosshead screwdriver Phillips



VDE insulated crosshead screwdriver, for Phillips screws, SDIK PH DIN 7438, ISO 8764/2-PH, output to ISO 8764-PH, SoftFinish grip

General ordering data

Type	SDIK PH1 X 80	Version
Order No.	2749890000	Screwdriver, Blade length: 80 mm
GTIN (EAN)	4050118897098	
Qty.	1 pc(s).	

VPU PV I II Spare Arrestor



Type II surge voltage arrester for use in photovoltaic applications

- Pluggable arrester
- Suitable for protecting DC systems
- High energy absorption with short response time
- Tested in accordance with EN 50539-11
- Suitable for use in accordance with IEC 60364-7-712 / EN 50539-12
- Coded voltage level
- Installation in distribution board
- Thermal protection function

General ordering data

Type	VPU PV I+II OM 1000	Version
Order No.	2534300000	Surge voltage arrester, Low voltage, Spare arrester
GTIN (EAN)	4050118545906	
Qty.	9 pc(s).	
Type	VPU PV I+II O 1000	Version
Order No.	2530600000	Surge voltage arrester, Low voltage, Accessories, Spare arrester
GTIN (EAN)	4050118540819	
Qty.	9 pc(s).	

VPU PV I+II 3 1000

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Blank



ESG is the tried-and-tested marker in MultiCard format for use on many well-known electrical devices. The result is high-quality device marking with a high-contrast appearance.

Various types are available for devices from manufacturers like Siemens, ABB, Beckhoff etc. Advantages at a glance:


- Tags for universal usage, self-adhesive or clip-on tags, depending on type
- For aligned equipment, e.g. circuit breakers, we supply ESG markers for clipping onto tag rails
- Individual laser-quality printing according to specifications

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	ESG 6/15 K MC NE WS	Version	
Order No.	1880100000	ESG, Device markers x 15 mm, PA 66, Colour: white, Self-adhesive	
GTIN (EAN)	4032248478781		
Qty.	200 pc(s).		

Slotted screwdriver



VDE insulated slot-head screwdriver, SDI DIN 7437, ISO 2380/2, drive output acc. to DIN 5264, ISO 2380/1. SoftFinish grip

General ordering data

Type	SDIS 1.0X5.5X125	Version	
Order No.	2749850000	Screwdriver, Blade width (B): 5.5 mm, Blade length: 125 mm, Blade thickness (A): 1 mm	
GTIN (EAN)	4050118897050		
Qty.	1 pc(s).		

VPU PV I+II 3 1000

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Replacement parts

VPU PV I II Spare Arrestor



Type II surge voltage arrester for use in photovoltaic applications

- Pluggable arrester
- Suitable for protecting DC systems
- High energy absorption with short response time
- Tested in accordance with EN 50539-11
- Suitable for use in accordance with IEC 60364-7-712 / EN 50539-12
- Coded voltage level
- Installation in distribution board
- Thermal protection function

General ordering data

Type	VPU PV I+II OM 1000	Version	
Order No.	2534300000	Surge voltage arrester, Low voltage, Spare arrester	
GTIN (EAN)	4050118545906		
Qty.	9 pc(s).		
Type	VPU PV I+II O 1000	Version	
Order No.	2530600000	Surge voltage arrester, Low voltage, Accessories, Spare arrester	
GTIN (EAN)	4050118540819		
Qty.	9 pc(s).		