

圖號. DRAWING. NO : FP3R-01V-1

品名 NAME : PVC INSULATED RING TERMINALS

校訂版次 REVISIONS

版次	記述 DESCRIPTION	DATE	核可
1	尺寸修改	2025. 02. 25	KEN


MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16
MAX AMP	9	12	17	18

NOTE:

1. MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS
2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
3. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	F ±0.30	L ±1.00	E ±1.00	D ±0.30	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	R1-2V	2.2	6.6	6.3	19.6	10.0	4.1	1.7	0.75
	R1-3V	3.2	5.5	4.0	16.7				
	R1-3.5SV	3.7	5.5	4.0	16.7				
	R1-3.5MV	3.7	6.6	6.3	19.6				
	R1-3.5LV	3.7	8.0	7.0	21.0				
	R1-4SV	4.3	6.6	6.3	19.6				
	R1-4LV	4.3	8.0	7.0	21.0				
	R1-5V	5.3	8.0	7.0	21.0				
	R1-6V	6.5	11.6	11.1	26.8				
	R1-8V	8.4	11.6	11.1	26.8				
	R1-10V	10.5	13.6	13.9	30.7				
	R1-12V	13.0	19.2	16.0	35.6				

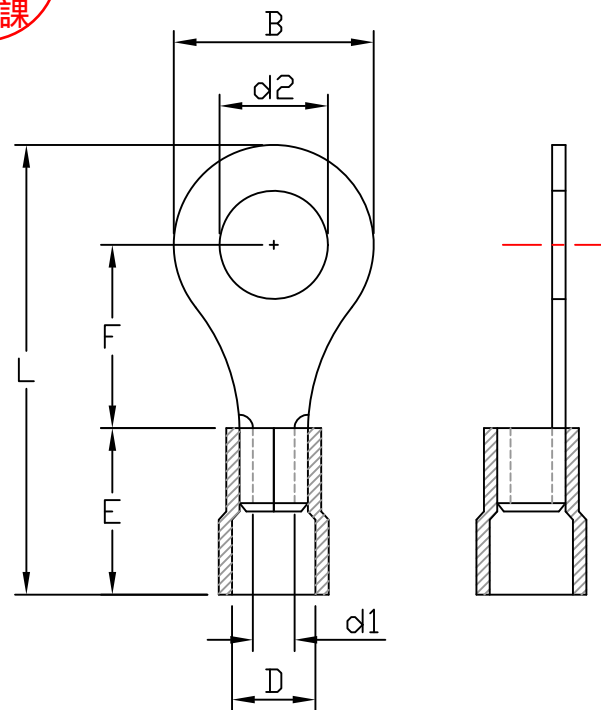

認可 APPROVALS

第三視角
THIRD VIEW

MATERIAL

單位UNIT

製圖 DRAFT: TINA

設計 DESIGN: KEN

核可 CHECKED: KEN

INSULATION : VINYL(PVC)

MATERIAL : COPPER

TIN PLATING

m/m

比例SCALE



集勝端子股份有限公司
JEESON TERMINALS Co., LTD

日期 DATE: 2015.01.05