

Constant voltage dimming

SLD15-12VLS-E/SLD15-24VLS-E/SLD30-12VLS-E/SLD30-24VLS-E/SLD60-12VLS-E/SLD60-24VLS-E



Product description:

The smart power supply is exclusively designed for 12V & 24V LED lamp. It can be used together with our control modules, IR/PIR sensors, Remote Controller and APP.



Standards:

EN61347-1
EN61347-2-13
EN61547
EN55015
EN61000-3-2
EN61000-3-3
EN62384
EN62493


Characteristics:

- Class II protection against electric shock from direct and indirect contact
- SELV output
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- The output current of the power supply could be dimmed between 2%-100% by IR/PIR sensors, Remote Controller or APP.

Specifications:


Model	SLD15-12VLS-E SLD15-24VLS-E SLD30-12VLS-E SLD30-24VLS-E SLD60-12VLS-E SLD60-24VLS-E						
Output	turn on time(S)	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5
	output power(W)	15	15	30	30	60	60
	output voltage(V)	12	24	12	24	12	24
	output voltage tolerance ¹	+/-5%	+/-5%	+/-5%	+/-5%	+/-5%	+/-5%
	ripple voltage(mV)	420(Vp-p)	420(Vp-p)	500(Vp-p)	500(Vp-p)	600(Vp-p)	600(Vp-p)
	working current range(A)	0-1.25	0-1.25	0-2.5	0-2.5	0-5.0	0-5.0
	dimming interface	CV PWM					
	dimming range	2%-100%					
Input	rated supply voltage(Vac)	220-240					
	voltage range(Vac)	198-264					
	line frequency(Hz)	50/60					
	input current(mA)	120	120	200	200	400	400
	efficiency ²	83.0%	83.0%	85.0%	85.0%	87.0%	87.0%
	average efficiency ³	78.0%	78.0%	83.0%	83.0%	85.0%	85.0%
	no load power consumption(W)	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5
	power factor ²	0.70C	0.70C	0.95	0.95	0.95	0.95
Protection	inrush current(Ipk)	20A/60uS	20A/60uS	24A/160us	24A/160us	40A/200us	40A/200us
	over voltage protection	YES	YES	YES	YES	YES	YES
	short circuit protection	YES	YES	YES	YES	YES	YES
	over temperature protection	YES	YES	YES	YES	YES	YES
	automatic restart	YES	YES	YES	YES	YES	YES
	over load protection	YES	YES	YES	YES	YES	YES
Ambient and Life	surge capacity	L-N: 0.5KV	L-N: 0.5KV	L-N: 1KV	L-N: 1KV	L-N: 1KV	L-N: 1KV
	Ta(°C)	-20...40					
	Tc max.(°C)	80	80	75	70	75	70
	Storage Temperature(°C)	-30...80					
	ambient humidity range	5%...85%RH, Not condensing					
	nominal life-time(hrs)	30'000@Ta=40 C					
Other	weight(g)	83		141		83	
	dimensions (LxWxH)(mm)	167x49x16		189x59x16		247x71x16	
	casing material	Plastic					
	housing colour	White					
	type of protection	IP20					
	protection class	ClassII					
Note	<p>1. Tolerance:includes set up tolerance, line regulation and load regulation.</p> <p>2. Tested at full load,230Vac.Refer to"Power Factor" and "EFFICIENT"curve graphs.</p> <p>3. Calculate the model's average efficiency for each test voltage by testing at 100%, 75%, 50%, and 25% of rated current and then computing the simple arithmetic erage of these four values.</p> <p>4. All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 of ambient temperature.</p> <p>5. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</p>						




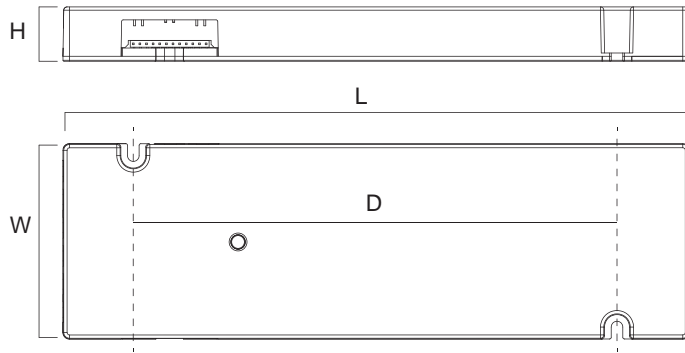





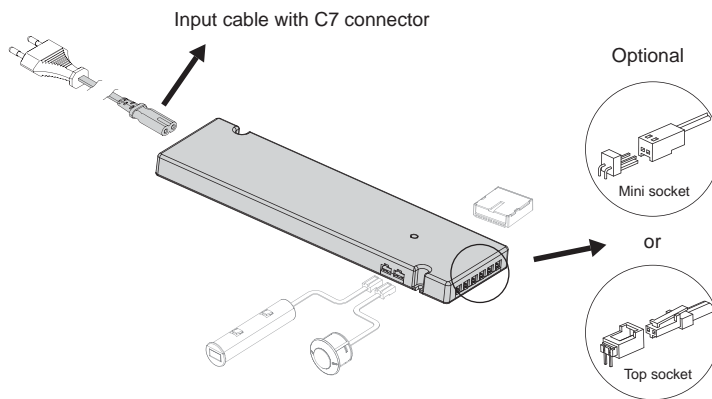


Dimensions(mm):





	SLD15-12VLS-E SLD15-24VLS-E	SLD30-12VLS-E SLD30-24VLS-E	SLD60-12VLS-E SLD60-24VLS-E
L(mm)	167	189	247
W(mm)	49	59	71
H(mm)	16	16	16
D(mm)	129	146	199

Wiring diagram:



Optional Accessories Table					
Type	SCM-1	SCM-2	SCM-3	SCM-4	Input Cable
Picture					
Function Characteristics	IR/PIR	IR/PIR/2.4G	IR/PIR/BT	IR/WIFI	-
Functional Fittings	IR Sensor  PIR Sensor  T/SLF5.876.048 SLF5.876.019 SLF5.876.045	IR Sensor  PIR Sensor  T/SLF5.876.048 SLF5.876.019 SLF5.876.045 Remote Controller for 2.4G  KZQ-8YKB	IR Sensor  PIR Sensor  T/SLF5.876.048 SLF5.876.019 SLF5.876.045 APP 	IR Sensor  T/SLF5.876.048 WIFI 	-

Electrical curves:

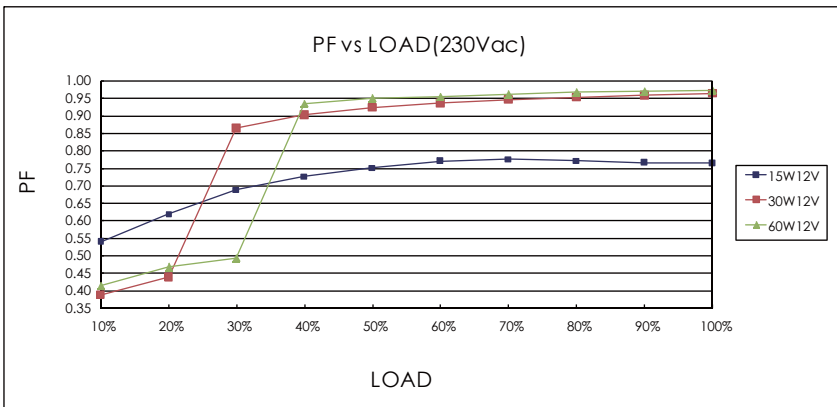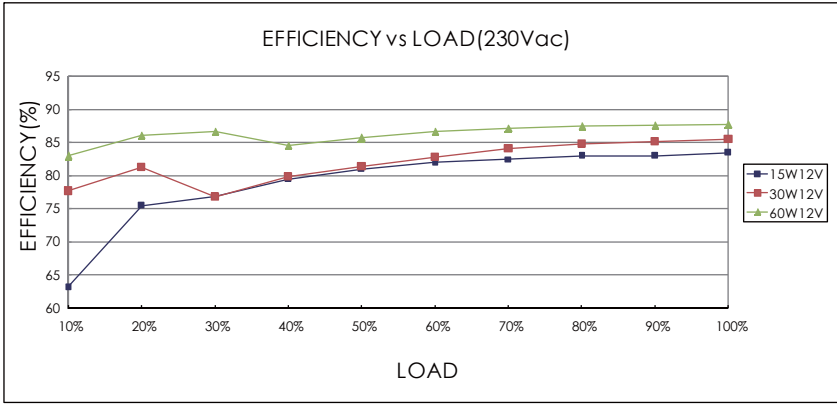

note

For constant current power supply, "LOAD" means the percentage of the maximum rated output voltage.
For constant voltage power supply, "LOAD" means the percentage of the maximum rated output current.

Sales & Technical Support:

Self Electronics Co.,Ltd.

Add: No. 1345 Ju Xian Road, Ningbo Hi Tech Park, Ningbo, China

Tel: 0086-574-28805765,28805658(For English Assistance)

0086-574-28805678 (For Chinese Assistance)

Fax: 0086-574-28805656

E-mail: sales@self-ecg.com

<http://www.self-ecg.com>

Self Electronics Co.,Ltd.,Shenzhen Office

Add: Room2007,Xinglang Xuan,Xinghe Mingju,Fuming Road,Futian District,Shenzhen

Tel: 0086-755-83558850, 83558851

Fax: 0086-755-83558840

SELF ELECTRONICS GERMANY GMBH

Add:August-Horch-Str. 7,51149 Koeln

Tel: 0049 2203 18501-0

Fax: 0049 2203 18501-199

E-mail: saleseu@self-electronics.com

*Due to continuous improvements and innovations,specifications are subjected to change without notice.