

# YS16V-E SERIES

## 18W



### Features

- Energy efficiency level VI
- Class II Power Supply
- 3 Years Warranty
- Universal AC input/Full range
- No load power consumption < 0.1W
- Protections: Short Circuit /Over Load / Over Voltage
- -20~+60°C wide range working temperature

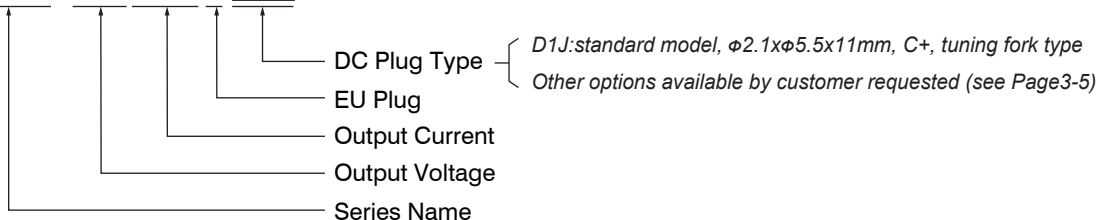
### Applications

- Digital Equipment
- Industrial Equipments
- Consumer Electronic Devices
- Telecommunication Devices

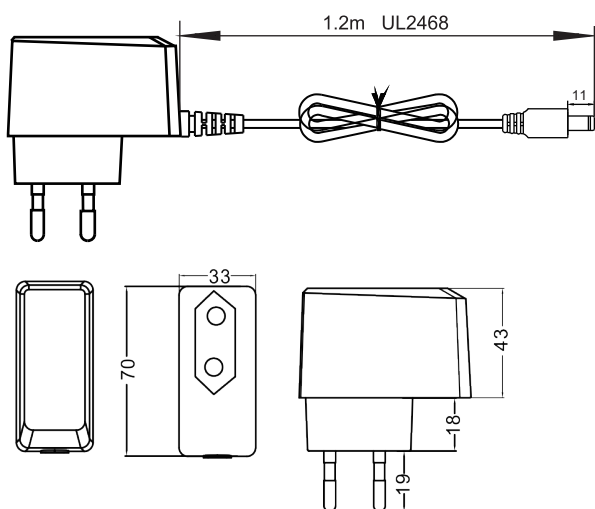


### Model Description

YS16V - XXXYYYY E-D1J



### Dimensions and installation



Standard Cable	1.2m UL2468 (Option: UL2464, UL1185)
5V	20AWG
9 ~ 15V	22AWG
24 ~ 36V	24AWG



## Specification

Model	Order P/N	YS16V-0503000E-D1J *	YS16V-0902000E-D1J	YS16V-1201500E-D1J	YS16V-1501200E-D1J	YS16V-2400750E-D1J	YS16V-3600500E-D1J
	Safety Model No.	YS16V-0503000	YS16V-0902000	YS16V-1201500	YS16V-1501200	YS16V-2400750	YS16V-3600500
Output	DC Voltage	5V	9V	12V	15V	24V	36V
	Rated Current	3A	2A	1.5A	1.2A	0.75A	0.5A
	Rated Power	15W	18W	18W	18W	18W	18W
	Ripple & Noise(max.)	60mVp-p	90mVp-p	120mVp-p	150mVp-p	240mVp-p	300mVp-p
	Voltage Tolerance	±5%	±5%	±5%	±5%	±5%	±5%
	Line Regulation	±3%	±3%	±3%	±3%	±3%	±3%
	Load Regulation	±5%	±5%	±5%	±5%	±5%	±5%
	Setup,Rise,Hold up Time	3.0s,60ms,30ms/230VAC(at full load)			3.0s,60ms,12ms/115VAC(at full load)		
Input	Rated Voltage Range	100-240VAC					
	Voltage Range	90-264VAC					
	Frequency Range	50/60Hz					
	AC Current	0.5A/115VAC		0.3A/230VAC			
	Inrush Current	Cold Start 50A/200us at 230VAC 50Hz			Cold Start 30A/200us at 115VAC 50Hz		
	Leakage Current	<0.25mA/230VAC					
	Efficiency	81.5%	85.5%	85.5%	86%	86%	86.5%
	No Load Power Consumption	<0.1W					
Protection	Over Load	105~150% Hiccup mode, recovers automatically after fault condition is removed.					
	Short Circuit	Shut down o/p voltage, re-power on to recover.					
	Over Voltage	120~180% Shut down o/p voltage, re-power on to recover.					
Ambient	Working TEMP.	-20 ~ +60 C (Please refer to "Derating Curve"section)					
	Working Humidity	20 ~ 95%RH Non-condensing					
	Storage TEMP. Humidity	-40 ~ +85 C, 10 ~ 95%RH Non-condensing					
	TEMP. Coefficient	±0.03%/(0 ~ 40 C )					
	Vibration	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes					
Safety	Safety Standards	IEC/EN62368-1					
	Withstand Voltage	I/P-O/P: 3KVAC/1min					
	Isolation Resistance	I/P-O/P:100M Ohms / 500VDC / 25 C / 70% RH					
EMC	EMC Emission	Parameter	Standard		Test Level		
		Conducted	EN55032(CISPR32)		CLASS B		
		Radiated	EN55032(CISPR32)		CLASS B		
		Harmonic Current	EN61000-3-2		CLASS B		
		Voltage flicker	EN61000-3-3		CLASS B		
	EMC Immunity	Parameter	Standard		Test Level		
		ESD	EN61000-4-2		Level 3, 8KV air, criteria A		
		Radiated Susceptibility	EN61000-4-3		Level 3, criteria A		
		EFT/Burest	EN61000-4-4		Level 3, criteria A		
		Surge	EN61000-4-5		Level 4, 2KV/L-N, criteria A		
		Conducted	EN61000-4-6		Level 3, criteria A		
		Magnetic Field	EN61000-4-8		Level 4, criteria A		
		Voltage Dips and interruptions	EN61000-4-11		> 95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods		
Others	Packing	120g/pcs; 50 x 29 x 38 cm; 100pcs/carton					
	Dimension (LxWxH)	70 x 33 x 43 mm					
	Plug and Cable	See page 3~5; Other type available by customer requested					
	MTBF	204.7Khrs min. MIL-HDBK-217F(25 C )					
Note	<p>1. Tolerance: includes set up tolerance, line regulation and load regulation.</p> <p>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</p> <p>3.Line regulation is measured from low line to high line at rated load.</p> <p>4.Load regulation is measured from 0% to 100% rated load.</p> <p>5. All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 C of ambient temperature.</p> <p>6. De-rating may be needed under low input voltages. Please refer to "Static Characteristic" sections for details.</p> <p>7. The power supply is considered as a component that will be operated in combination with final equipment.Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</p> <p>8.YS16V-0503000 only complies with CE standard, but does not comply with GS standard.</p>						

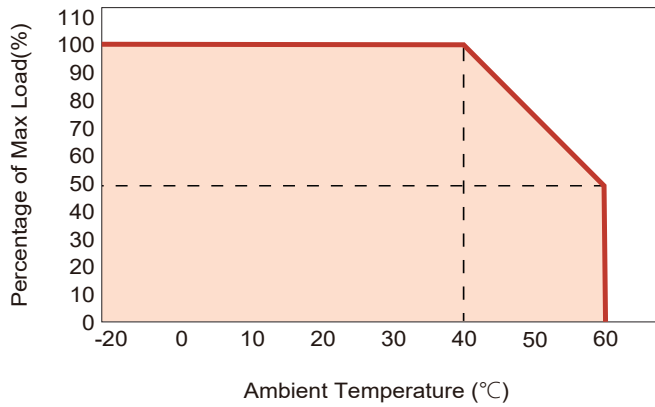
File last modification time: 2025-2-25

# YS16V-E SERIES

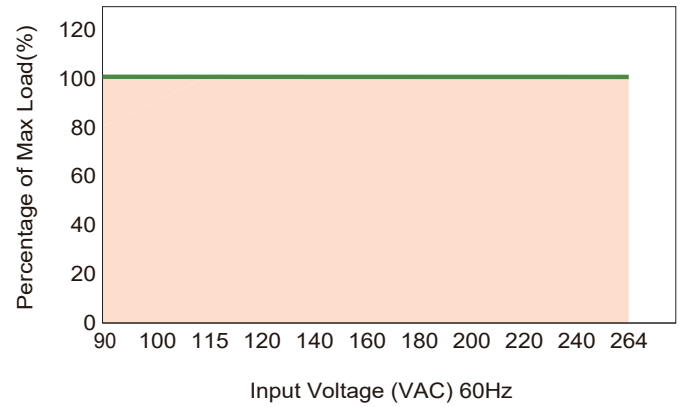
## 18W

### Feature Curves

#### 1. Derating Curve

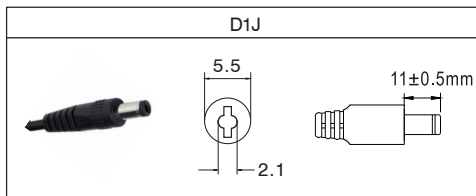
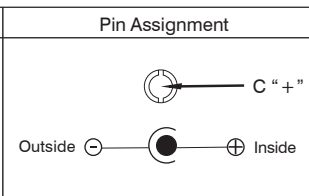


#### 2. Static Characteristics



### DC Output Plug (Option)

Standard Model : D1J

D1J	Pin Assignment
	

Optional DC plug:


Tuning Fork Style	Straight		
	A	B	C
Type No.	OD	ID	L
	D1I	5.5	2.1
D1L	5.5	2.5	9.5
D1M	5.5	2.5	11.0


Tuning Fork Style	Right-angled		
	A	B	C
Type No.	OD	ID	L
	D1IR	5.5	2.1
D1JR	5.5	2.1	11.0
D1LR	5.5	2.5	9.5
D1MR	5.5	2.5	11.0

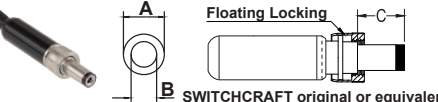
# YS16V-E SERIES


## 18W

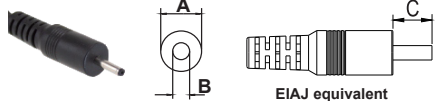
### DC Output Plug (Option)

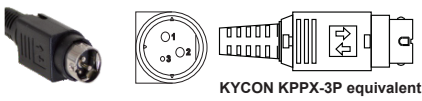
Barrel Style			
	A	B	C
Type No.	OD	ID	L
D2I	5.5	2.1	9.5
D2J	5.5	2.1	11.0
D2L	5.5	2.5	9.5
D2M	5.5	2.5	11.0

Barrel Style			
	A	B	C
Type No.	OD	ID	L
D2IR	5.5	2.1	9.5
D2JR	5.5	2.1	11.0
D2LR	5.5	2.5	9.5
D2MR	5.5	2.5	11.0

Lock Style			
	A	B	C
Type No.	OD	ID	L
D2S(S761K)	5.53	2.03	12.06
D2K(761K)	5.53	2.54	12.06
D2C(S760K)	5.53	2.03	9.52
D2D(760K)	5.53	2.54	9.52

Center Pin Style				
	A	B	C	D
Type No.	OD	ID	L	Center Pin
D4A	5.5	3.4	11.0	1.0
D4B	6.5	4.4	11.0	1.4
D4C	7.4	5.1	11.0	0.6

Tuning Fork Style			
	A	B	C
Type No.	OD	ID	L
D3A	2.35	0.7	11.0
D3B	4.0	1.7	11.0
D3C	4.75	1.7	11.0

MIN.Din 3Pin with Lock(male)		
	Pin Assignment	
	PIN No.	Output
M6B	1	+Vo
	2	-Vo
	3	+Vo

# YS16V-E SERIES

## 18W

### DC Output Plug (Option)

<b>MIN.Din 4Pin with Lock(male)</b>										
<b>Type No.</b>	<b>Pin Assignment</b>									
	<table border="1"> <thead> <tr> <th>PIN No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vo</td> </tr> <tr> <td>2</td> <td>-Vo</td> </tr> <tr> <td>3</td> <td>-Vo</td> </tr> <tr> <td>4</td> <td>+Vo</td> </tr> </tbody> </table>	PIN No.	Output	1	+Vo	2	-Vo	3	-Vo	4
PIN No.	Output									
1	+Vo									
2	-Vo									
3	-Vo									
4	+Vo									
<b>M7B</b>										

<b>MIN.Din 4Pin with Lock(female)</b>										
<b>Type No.</b>	<b>Pin Assignment</b>									
	<table border="1"> <thead> <tr> <th>PIN No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vo</td> </tr> <tr> <td>2</td> <td>-Vo</td> </tr> <tr> <td>3</td> <td>-Vo</td> </tr> <tr> <td>4</td> <td>+Vo</td> </tr> </tbody> </table>	PIN No.	Output	1	+Vo	2	-Vo	3	-Vo	4
PIN No.	Output									
1	+Vo									
2	-Vo									
3	-Vo									
4	+Vo									
<b>M7BF</b>										

<b>Barrel Style</b>												
<b>Type No.</b>	<b>Pin Assignment</b>											
	<table border="1"> <thead> <tr> <th>PIN No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-Vo</td> </tr> <tr> <td>2</td> <td>-Vo</td> </tr> <tr> <td>3</td> <td>+Vo</td> </tr> <tr> <td>4</td> <td>-Vo</td> </tr> <tr> <td>5</td> <td>+Vo</td> </tr> </tbody> </table>	PIN No.	Output	1	-Vo	2	-Vo	3	+Vo	4	-Vo	5
PIN No.	Output											
1	-Vo											
2	-Vo											
3	+Vo											
4	-Vo											
5	+Vo											
<b>M1B</b>												

<b>Stripped and tinned leads</b>						
	<p>Length of Land L1 by request          YJ's standard length, L: 30 mm, L1: 5 mm          NOTE: The wire color is for reference only, please refer to the actual product</p>					
<b>Type No.</b>	<b>Pin Assignment</b>					
	<table border="1"> <thead> <tr> <th>PIN No.</th> <th>Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vo</td> </tr> <tr> <td>2</td> <td>-Vo</td> </tr> </tbody> </table>	PIN No.	Output	1	+Vo	2
PIN No.	Output					
1	+Vo					
2	-Vo					
<b>by customer</b>						

<b>Type-C</b>			
<b>Type No.</b>	<b>A</b>	<b>B</b>	<b>C</b>
	<b>OD</b>	<b>ID</b>	<b>L</b>
<b>C1</b>	<b>2.4</b>	<b>1.3</b>	<b>8.25</b>